



# MULTIRAY INFRARED DETECTOR M200 - SERIES

WALL MOUNTING

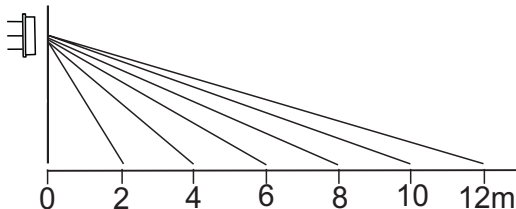

0° 2.2M height

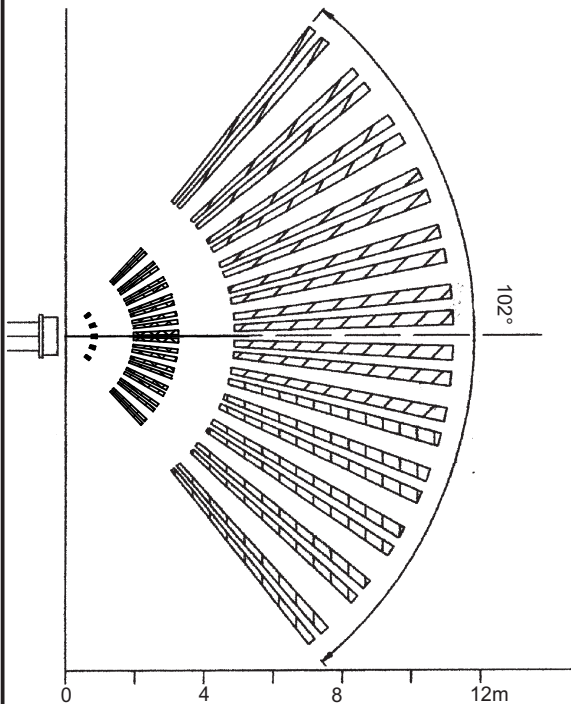

## FEATURES


1. Indoor installation.
2. Digital low frequency filtering.
3. Latest technology on PIR detection.
4. High stability detector.
5. 24 month local factory warranty.
6. Free Installers training.
7. Pet friendly adjustment.

## SPECIFICATIONS

1. Operating Voltage: 9 -16 volts DC.
2. Current: 15mA N/C.
3. Tamper Output: N/C.
4. Temperature Range: -10°C to +65°C.
5. Walk Test: LED switchable.
6. Dimensions:90 x 55 x 50mm.
7. Viewing Angle: 102°, 8-12M.
8. Warm Up Period: 20 seconds.
9. Installation 2.2m height.

## UNIVERSAL CONNECTION DIAGRAM

### Wiring Connector

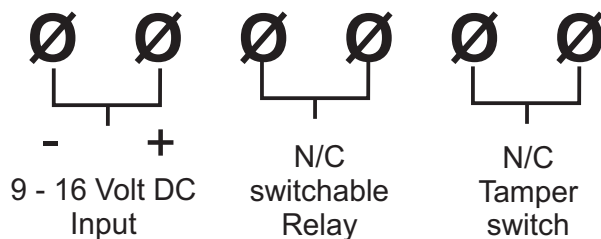

Manufactured in South Africa by  
**Eurolock Security Systems**  
Email:info@eurolock.com