


# MULTIRAY WIRELESS DETECTOR W4040 - SERIES

## WALL PLUGS MOUNTING

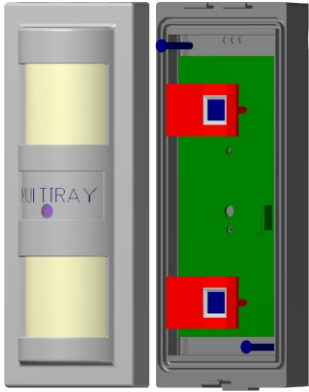

0° 1.4M height  
(from center of unit)

## FEATURES

1. Outdoor & indoor installation.
2. Dual optical infrared detection.
3. Digital low frequency filtering.
4. Auto sensitivity adjustment.
5. 2 or 3 pulses adjustable.
6. Normal or high sensitivity adjustable.
7. Latest technology on PIR detection.
8. 24 month local factory warranty.
9. Free Installers training.

### Installation Notes:

\*Do not install unit facing public roads, unless property has high walls.

\*Unit must be installed 2m radius away from plants.


\* Front screw is for tamper & water proofing.

\*To adjust direction, use bracket supplied.

\* 99% immunity to false alarms.

\* To block a portion of detection area, use tape.

\* Unit can be installed to existing alarm systems through 3 channel coded receiver, optional.


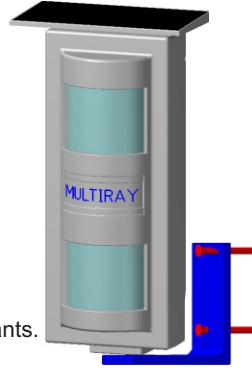


## SPECIFICATIONS



1. Operating Voltage: 3.7 volts DC lithium rechargeable battery.
2. Build-in charger through solar panel.
3. Current: 20µA standby.
4. Tamper Output: internally connected.
5. Temperature Range: -10°C to +65°C.
6. Walk Test: LED switchable.
7. Dimensions: 195 x 85 x 60mm.
8. 1.4m height normal installation.
9. 1.4m height pet avoidance.
10. Viewing Angle: 102°, 8-12M.
11. Warm Up Period: 20 seconds.
12. System UV protected.

0° 1.4M standard height  
(from center of unit)

### Detection Pets Area



### Alternative Detection for Standard Coverage Lens



Top view of detection beams

Side view of detection beams

Manufactured in South Africa by Eurolock Security Systems  
Email: info@eurolock.com